

## RECONFIGURABLE CIRCUITS USED IN SMART HOUSES

BY

ADRIAN BREZULIANU<sup>12\*</sup>, MARIUS HAGAN<sup>1</sup> and CRISTIAN AGHION<sup>12</sup>

<sup>1</sup> SC GREENSOFT SRL, IASI ROMANIA,

<sup>2</sup> TECHNICAL UNIVERSITY "GHEORGHE ASACHI", IASI ROMANIA

Received: June 12, 2010

Accepted for publication: February 18, 2011

**Abstract.** The wide field of intelligent buildings includes a variety of technical solutions, from the physical structure and the location of the building to the options an intelligent house can offer. We shall study the smart house type that accommodates most general use situations, with no need to modify, for instance, the physical structure of the house.

**Keywords:** smart metering, measuring, monitoring, energy management, energetic potential.

### 1. Introduction

In most cases, in order to have a smart house, it is necessary to get as much information as possible from inside the house [1], as well as from outside the house [2]. This is done by various sensors, such as:

- from inside the house: security sensors, fire and smoke sensors, water consumption sensors, electricity consumption sensors, oxygen sensors, light sensors, pressure sensors, temperature sensors, gas sensors ;

- from outside the house : light, temperature, house access, wind sensors [3,4].

For a complete intelligent house concept, in addition to the information received from the above sensors, we also need: data communication, television

---

\* Corresponding author: *e-mail:* [abrezu@etti.tuiasi.ro](mailto:abrezu@etti.tuiasi.ro); *phone:* +40-232-213737

and phone. The information received from the sensors is sent towards one or several command circuits that control and monitor the house.

Based on the information read by the sensors, the monitoring and control circuit makes decisions on the choice of a functioning pattern. From this perspective, there are two control concepts: temporal and behavioural control.

Temporal control refers to the analysis of the information received from the sensors in order to decide on control patterns that reach certain functioning thresholds previously set: for instance – 22 degrees minimum temperature, 24 degrees maximum temperature, etc.

In behavioural control, the data received from the sensors are processed together in order to render a general picture of the smart house. For instance, if the temperature inside the house is found to be too high, external temperature and the position of the sun are also taken into consideration in making a decision: activating the shading device outside the building and turning on the air conditioning (HVAC). The shading device will also minimize the amount of light received by the building, but the light sensors inside will insure the necessary light for the proper functioning of the house. One can say that implementing this concept is a balanced approach for using sensor data and for achieving a smart house in the broad sense of the term.

## **2. Smart Metering**

Starting from the smart house concept, we get to the next development step – the intelligent house [5]. Thus, in addition to the features presented above, there are options on increased data transfer towards the outside world, as well as access to services delivered by third party companies. The possible features belong to various fields: security, entertainment, social services, maintenance services, supply, etc. For example, in the security field, in addition to the alarm going off when the sensors detect movement inside, an intelligent house is also equipped with options such as: turning on the surveillance cameras, taking high resolution (clearer) pictures, calling the owner, calling the security firm/the police, allowing voice messages with the house, blocking the access to the safe, etc. The block diagram of such a system is presented in Figure 1.

The Programmable Logic Controller (PLC) is the central element of the system and its main functions are to communicate with various sensors, to process and transmit data.

The reconfiguration characteristic of the programmable logic controller is that it can adapt, so that circuits (sensors, for instance) can be added to or removed from the system at any time during functioning [6,7,8].

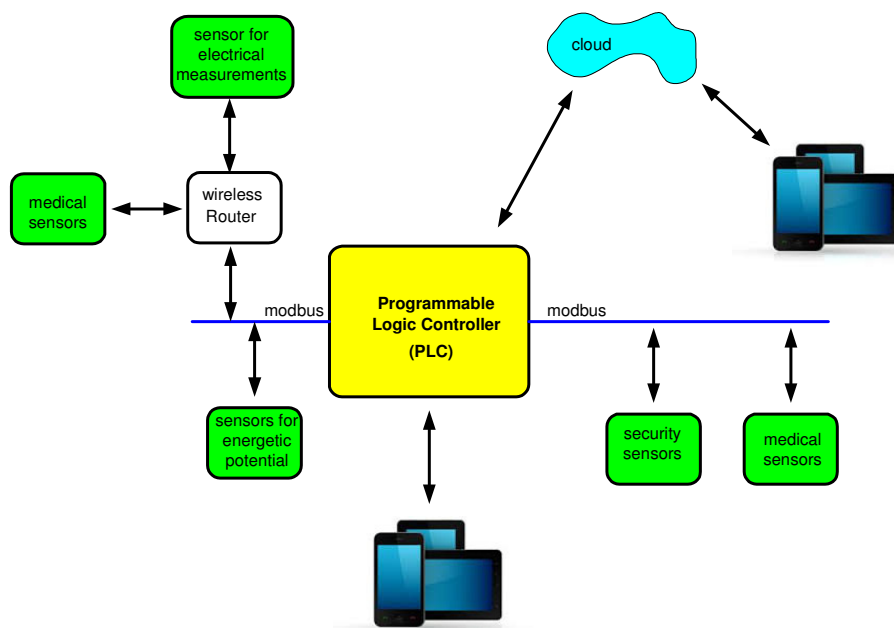


Fig. 1 Block diagram of a reconfigurable system

Thus, by means of a graphic programming interface - GUI (Graphical User Interface), we can modify the configuring parameters for each sensor, we can opt for local data processing (for example, the detection of threshold values in case of an alert), for local data transfer (to a smartphone) or remote transfer (to the cloud).

The sensors connecting to PLC belong to different categories:

- ✓ security sensors (movement sensors, smoke sensors, vibration sensors, thermal sensors)
- ✓ energy consumption sensors (electricity, gas, cold water, hot water, thermal energy meter)
- ✓ energetic potential sensors (wind, light, geothermal energy)
- ✓ medical sensors (sensors for registering the parameters of the living environment - temperature, humidity, pressure, virology, etc.)

### 3. The Programmable Logic Controller (PLC)

The design of the programmable logic controller involves two parts: hardware and software. At hardware level, it should insure a direct connection interface with various modules, sensors and communication circuits. The software level includes the configuration of each circuit/module/sensor, local data pre-processing and remote or local data transfer.

#### 3.1 The software configuration of the Programmable Logic Controller (PLC)

This can be accomplished by a GUI (Graphical User Interface) programmable interface located on a mobile device (a tablet) or on a server, as shown in the block diagram in Figure 2.

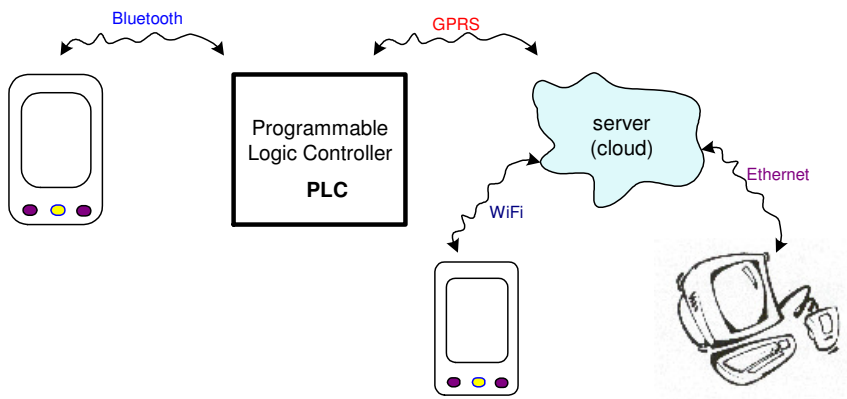


Fig. 2 The block diagram of the interface with the control circuit (PLC)

According to Figure 2, the programmable logic controller can be configured either locally (by smartphone/tablet) or remotely (by PC or smartphone/tablet). For remote configuration, the data transmission chain includes a server (cloud) facilitating the data exchange both ways. This server can also store data (database) resulting from various sensors connected to the PLC. This function is very useful because it helps create a log for events such as data visualization, data transfer to other interested users (for instance to water or electricity providers, etc.).

### 3.1 The hardware configuration of the Programmable Logic Controller (PLC)

This level insures the electric connection interface between PLC, communication modules and various sensors. The sensors are connected to PLC through a MODBUS or CAN communication network and are identified by means of a unique ID. Based on this ID, the PLC identifies data and then forwards it to the server (or locally to the smartphone/tablet). The ID also allows the PLC to send the configuration data for each sensor; the configuration is carried out based on a GUI graphical interface (installed either locally – o a smartphone/tablet or remotely – on a server).

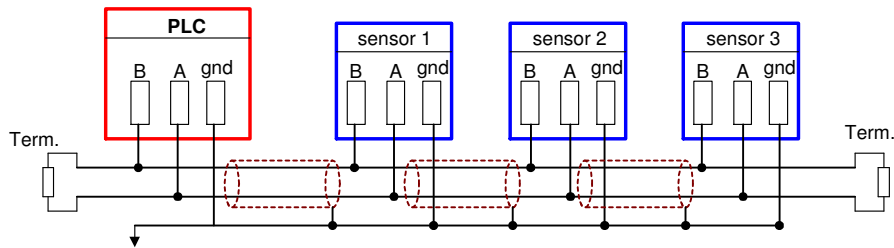


Fig. 3 The block diagram of the interface between the PLC and various sensors

The communication protocol MODBUS can be implemented on the communication interface (RS232/422/48/Ethernet) available of various sensors. Moreover, if it is absolutely necessary to use a special type of sensor that only has a SPI/I2C interface, this sensor will be attached a converter SPI/I2C <-> RS232/422/48/Ethernet in order to adapt it to the preexisting network.

In order to further develop this concept, an intelligent house also needs to draw on energy resulting from renewable sources (wind, solar, geothermal energy, etc.) [9,10,11]. The most popular sources are by far the wind and the sun. Figure 4 presents a block diagram for the use of these resources.

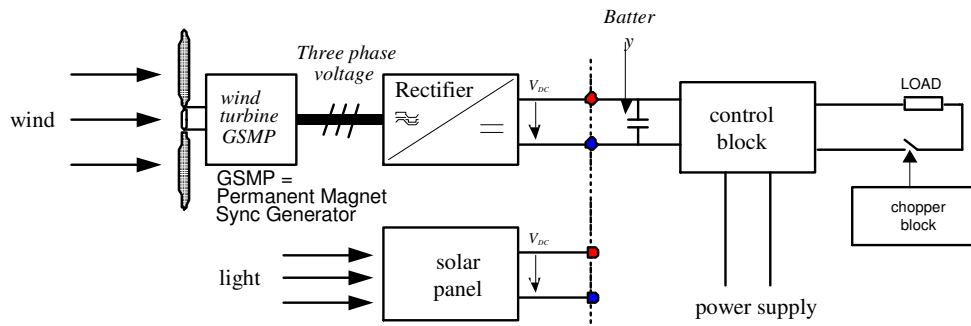


Fig. 4 Using renewable energy sources

According to the diagram in Figure 4, the supply of the load resistance (for instance the electric resistance of a boiler) is controlled by the Chopper Block. Therefore, if at a certain point there are no energy resources (no light and no wind), the load resistance supply draws on the national electrical grid. However, if there is energetic potential, the control block will primarily switch the supply of the load resistance to the energy resulting either from a wind turbine or solar panels. Sometimes, there is a surplus of energy and if special circuits are used, the excess energy will be directed to the national electrical grid. Such special circuits are called synchronous inverters connected to the grid.

The wind turbine is made up of a permanent magnet synchronous generator (PMSG) functioning at variable speed. The rectifier helps transform the alternating energy produced by the turbine into direct current electricity (a.c.-c.c.).

The main block in the diagram above is the d.c.-d.c. converter, based on a buck-boost converter architecture, presented in Figure 5.

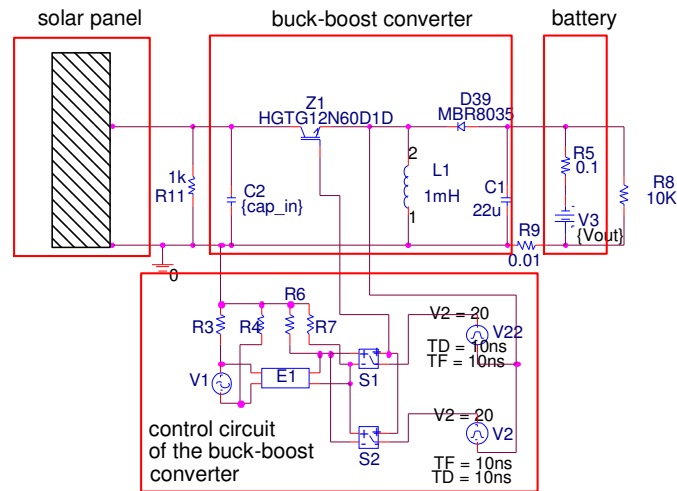


Fig. 5 Control circuit

The calculations made in designing the buck-boost d.c.-d.c. converter [12,13] are presented below. The design is based on a situation in which a voltage  $V_1 = 100V$  is applied at the input of the converter and the values intended are the following:  $V_2 = 200V$  (at the output), functioning frequency = 28KHz, ripple current through the coil = 20% (of the maximum output current), maximum output current = 10A.

Considering the input values above, the following equations can be written:  $V_1 dT = V_2(1-d)T$ ,  $\frac{V_2}{V_1} = \frac{d}{1-d}$ ,  $2 = \frac{d}{1-d}$ ,  $d=0.67$  (1)

Frequency = 28KHz, Period  $T = \frac{1}{\text{Frequency}} = 35.71\mu\text{s}$ ,

when  $t_{\text{ON}} = 23.8\mu\text{s}$  and  $t_{\text{OFF}} = 11.9\mu\text{s}$  (2)

When the transistor is blocked, the coil voltage  $|e|$  is:

$|e| = \frac{L * di}{dt} = 200.6 \text{ V}$ , where  $L = e * \frac{\Delta t}{\Delta I} = 200.6 * \frac{t_{\text{OFF}}}{2} = 1.19 \text{ mH}$  (3)

By choosing the magnetic core type PM 74/59 having the following parameters

$$\begin{cases} l_e = 128 \text{ mm} \\ A_e = 7.9 \text{ cm}^2 \\ A_{\text{min}} = 630 \text{ mm}^2 \\ V_e = 1010000 \text{ mm}^3 \\ A_l \approx 10000 \text{ nH} \\ \mu_e = 1290 \end{cases}$$

We can calculate:

- the number of spires:

$$N_{\text{min}} = \frac{L * I_{\text{Max}} * 10^4}{B_{\text{Max}} * A_e} = \frac{1.19 * 10^{-3} * 10 * 10^4}{250 * 10^{-3} * 7.9} = 60.25 \text{ spires} \quad (4)$$

- the electrical gap of the magnetic circuit selected :

$$l_g = \frac{\mu_e * \mu_r * N^2 * A_e * 10^{-1}}{L} = \frac{4 * \pi * 10^{-7} * 60.25^2 * 7.9 * 0.1}{1.19 * 10^{-3}} = 3.02 \text{ mm} \quad (5)$$

- the maximum repetitive current through the coil, transistor and diode is the

following :  $I_{LM} = I_{QRM} = I_{DRM} = I_L + \frac{\Delta i_L}{2} = \frac{dV_1}{(1-d)^2 R} + \frac{dV_1}{2Lf}$ ,

where  $R = \frac{V_2}{10A} = 20\Omega$

$$I_{LM} = I_{QRM} = I_{DRM} = \frac{0.67 \cdot 100}{(1-0.67)^2 \cdot 20} + \frac{67}{2 \cdot L \cdot Freq} = 30.76 + 1 = 31.76A \quad (6)$$

- the average value of the current through the transistor is:

$$I_{Qavr} = dI_L = \left(\frac{d}{1-d}\right)^2 \frac{V_1}{R} = \left(\frac{0.67}{0.33}\right)^2 * \frac{100}{20} = 4.122 * 5 = 20.61A \quad (7)$$

- the average value of the current through the coil is:

$$I_{Davr} = (1-d)I_L = \frac{d}{1-d} * \frac{V_1}{R} = \frac{0.67}{0.33} * \frac{100}{20} = 10.15A \quad (8)$$

#### 4. The intelligent house network

After the creation of intelligent houses, one step further would be connecting them into a network in order to facilitate the data exchange. For instance, the utilities (water, energy) providers can interrogate such networks and find out the consumption level at a certain point in time. This would allow them to manage consumption profiles for each client. The block diagram of such a network is presented in Figure 6.

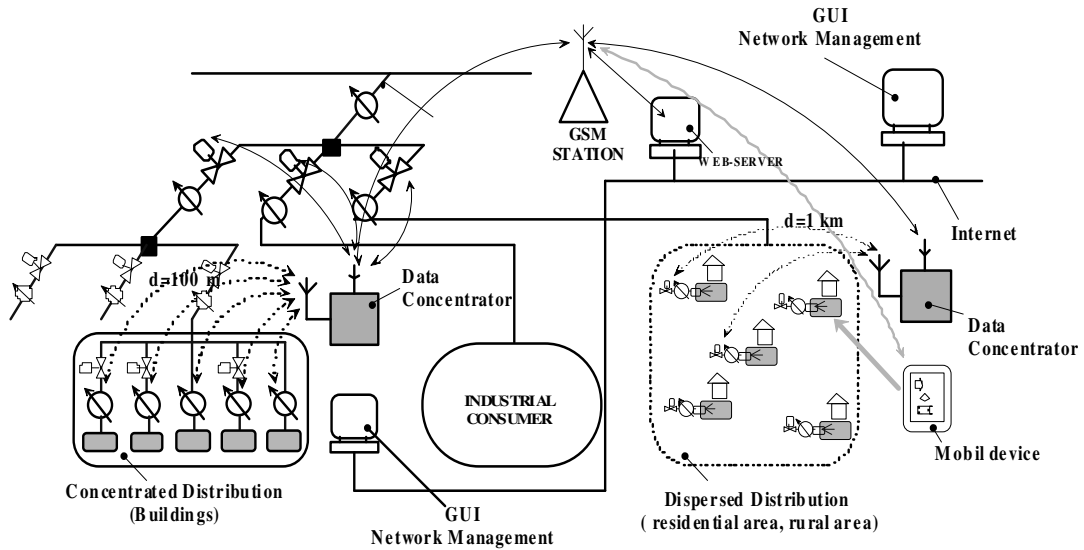


Fig. 6 – Metropolitan network of resource management



#### 4. Conclusions

A home can be seen both as an energy consumer and an energy producer. If it is equipped with energy generation and management devices, the users' living conditions improve and the maintenance costs diminish. The method suggested in this paper (the hybrid use of low-voltage grid electricity and of renewable energy sources) has the following benefits: reducing energy consumption costs and reducing greenhouse effect by a decrease in carbon emissions, especially in summer. An significant part of the solutions presented in this paper resulted from the implementation of the research project **SisConGes**.

**Acknowledgments.** This work was supported by the research project SisConGes – Developing a reconfigurable system for the control of intelligent buildings and for the management of energy generated from renewable sources within the programme “Increasing the competitiveness of the Regional Innovative Cluster EURONEST IT&C Hub and stimulating the interaction between members in order to develop high technology products and services”, code SMIS 49786, POSCCE 2007-2013, Axis 1, DMI 1.3, Operation 1.3.3.

#### REFERENCES

- [1] Corbusier Le., *A house is a machine for living*, Dynasty Home Automation Laboratories Retrieved 10 June 2014.
- [2] Spicer D., *If You Can't Stand the Coding, Stay Out of the Kitchen: Three Chapters in the History of Dr Dobbs's*. Drdobbs.com. Retrieved 2012-10-26.
- [3] Ramler J. R. and R. M. Donovan *Wind Turbines for Electric Utilities: Development Status and Economics*, Report DOE/NASA/1028-79/23, NASA TM-79170, AIAA-79-0965, June 1979.
- [4] Nayeem R. and Ullah T. T., *Variable Speed Wind Turbines for Power System Stability Enhancement*, Energy Conversion, IEEE Transactions on Energy Conversion, 2007, vol. 22, no. 1, pp: 52-60.
- [5] Cetin S., Sazak B. S., *Triple Half Bridge Series Resonant Inverter for Home Cooking Applications*, International Review of Electrical Engineering (IREE), vol. 4 n. 2, April 2009, pp. 168 – 173.
- [6] Erfidan T., Urgan S., Hekimoglu B., *Low cost microcontroller based implementation of modulation techniques for three-phase inverter applications*, Electrotechnical Conference, 2008. MELECON 2008. The 14th IEEE Mediterranean, pp. 541-546.
- [7] Barleanu A., Baitoiu V., Stan A. *Digital filter optimization for C language*, Advances in Electrical and Computer Engineering 2011; vol. 11; pp. 111-114.
- [8] Valachi A., Timis M., Danubianu M., *Some Contributions to Synthesis and Implementation of Multifunctional Registers*, 11th WSEAS Int.Conf. on Automatic Control, Modelling & Simulation (acmos'09), Istanbul, Turkey, May 30 - June 1, 2009, p.146-149.

- [9] Saha A.K., Chowdhury S., Chowdhury S.P., Crossley, P.A., *Modeling and Performance Analysis of a Microturbine as a Distributed Energy Resource*, Energy Conversion, IEEE Transactions on, 2009, vol. 24, no. 2, pp: 529-538.
- [10] Kusiak A., Zhe S. and Haiyang Z., *Anticipatory Control of Wind Turbines With Data-Driven Predictive Models*, Energy Conversion, IEEE Transactions on on Energy Conversion, 2009, vol. 24, no. 3, pp: 766-774.
- [11] De Broe A.M., Drouilhet S., Gevorgian V., *A peak power tracker for small wind turbines in battery charging applications*, Energy Conversion, IEEE Transactions on on Energy Conversion, 1999, vol. 14, no. 4, pp: 1630-1635.
- [12] Pletea I.V., Pletea M., Alexa D., Lucanu N., *Simulations and Analysis and Operating Regime as Rectifier with Power Factor Correction of Two - Quadrant Converter with RNSIC*, Advances in Electrical and Computer Engineering, Volume 11, Number 3, Year 2011, pp. 29 – 34.
- [13] Rata G., *The Study of the Deforming Regime of AC/AC Converter using Fourier and Multiresolution Analysis*, Electronics and Electrical Engineering, Kaunas: Technologija, Issue: 5, pp.7-12, 2012, DOI: 10.5755/j01.eee.121.5.1643.

## CIRCUITE RECONFIGURABILE UTILIZATE IN SMART HOUSES

(Rezumat)

În domeniul larg al clădirilor inteligente pot fi incluse o varietate de soluții tehnice pornind de la structura fizică a clădirii, zona de amplasament până la dotări/opțiuni cu care este echipată casa inteligentă. În aceasta lucrare s-a studiat soluția de tip „smart house” care se potrivește la cât mai multe situații de uz general, fără a fi nevoie ca implementarea unei soluții să modifice, de exemplu, structura fizică a casei. Pentru a completa conceptul de casă inteligentă, față de informațiile primite de la senzorii enumerați mai sus mai sunt necesare: comunicații de date, televiziune și telefonie. Informațiile primite de la senzori sunt trimise către unul sau mai multe circuite de comandă care controlează și monitorizează casa.